




MAIN SPECS OF TELESCOPIC BOOM LIFT


ZT58J

Comply with CE Standard

Model	ZT58J	
	Metric	Imperial
Siz	е	
Work Height	58.8m	192ft 11in
Platform Height	56,8m	186ft 4in
Horizontal Outreach	25.5m	83ft 8in
A - Stowed Length	14.4m	47ft 3in
B - Stowed Width	2.5m	8ft 2in
C - Stowed Height	3.06m	10ft
D - Platform Length	2.44m	8ft
E - Platform Width	0.91m	3ft
F - Wheelbase	5.357/4.69m	17ft 7in/15ft 5in
Tread	2.5/5.15m	8ft 2in/16ft 11in
G - Ground Clearance	0.40m	1ft 4in
Perforn	nance	
Platform Capacity (Unrestricted/Restricted)	300/454kg	660/1000lb
Drive Speed (Stowed)	4.5km/h	2.8mph
Gradeability	45%(24°)	
Turning Radius (Inside)	6.79/2.57m	22ft 3in/8ft 5in
Turning Radius (Outside)	8.43/6.39m	27ft 8in/20ft 12in
Turntable Swing	360° non-continuous	
Platform Rotation	±90°	
Tail Swing	2.25m	7ft 5in
Jib (Range of Articulation)	125°(-55°~70°)	
Max. Wind Speed	12.5m/s	28mph
Pow	<i>i</i> er	
Engine	Cummins QSF3.8	
Fuel Tank Capacity	200L	52.8gal
Control Voltage	12V DC	
Hydraulic Tank Capacity	400L	105gal
Drive Mode	4WD	
Steering Mode	Four wheels/Front wheel/Crab	
Tir	e	
Туре	445/50 D710 F	oam-filled Tires
Weig	ght	
Gross	29600kg	65256lb





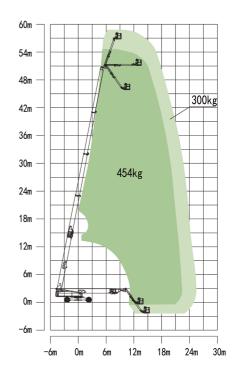

Range of Motion ZT58J